




Elpro

EDT / EKT / EST / ETT / EUT DISCONNECTORS WITH VISIBLE ISOLATION

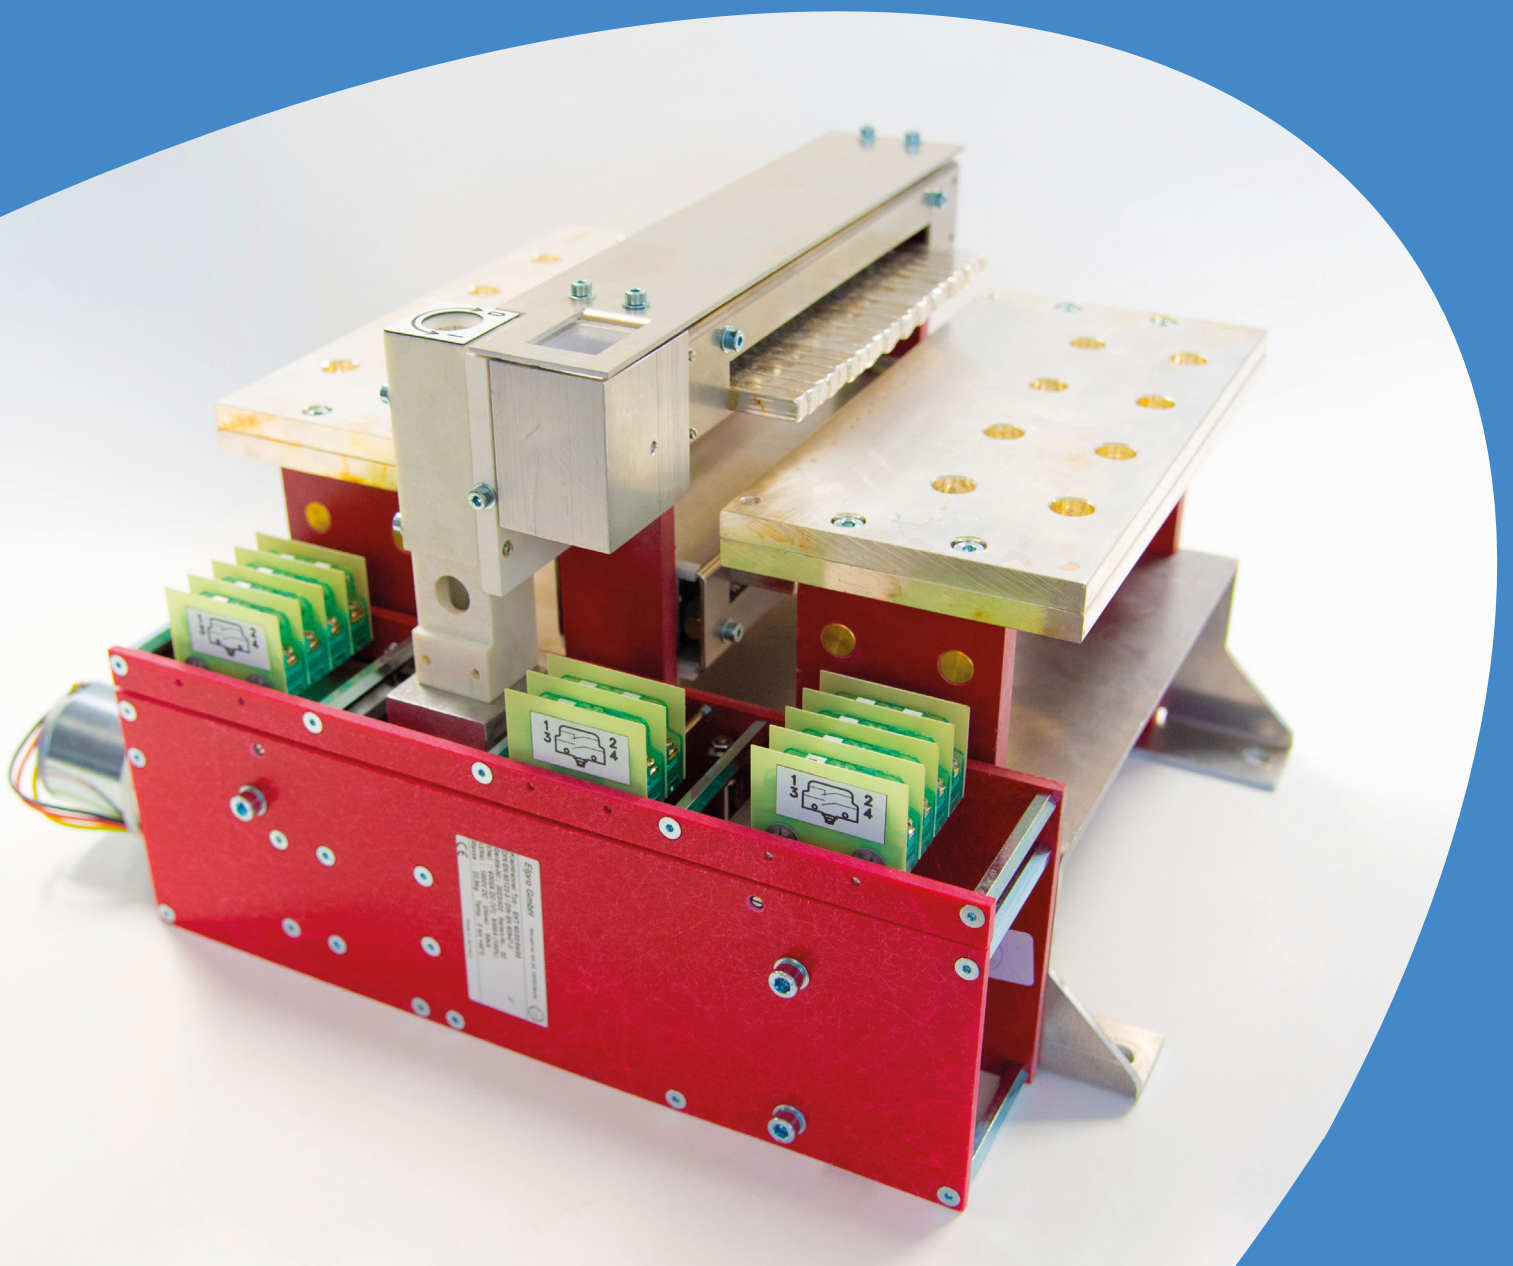

Technical Data

Rated voltage:	3600 V
Power-frequency withstand voltage: (air / isolating distance)	11,5/13,8 kV
Overvoltage category:	OV3
Load class:	VI
Operation:	Motor drive and manual crank drive
Environmental conditions:	Indoor installation

Type	Version	Rated current in A DC	Rated short-time current in kA DC	Number of switching operations	Dimensions L×W×H	Weight kg
EDT 20	Double disconnector	2.500	80	20.000	415x160x395	12
EDT 40	Double disconnector	4.000	80	20.000	415x160x395	13
EKT 40	Compact disconnector	4.000	80	20.000	450x285x253	20
EKT 60	Compact disconnector	6.000	80	20.000	450x285x253	24
EST 10	Rail disconnector	1.000	63	30.000	290x165x330	8
EST 25	Rail disconnector	2.500	80	30.000	370x165x381	13
EST 40	Rail disconnector	4.000	80	30.000	370x165x430	17
ETT 12	Triple disconnector	1.250	40	20.000	564x160x395	13
EUT 20	Changeover disconnector	2.500	80	20.000	415x160x395	12
EUT 40	Umschalttrenner	4.000	80	20.000	415x160x395	13

